

UltraView

TECHNICAL DATASHEET

UltraView is VeriVide's range of tuneable LED light booths designed to deliver standardised visual assessment across global supply chains. Available in two sizes to suit your workflow.



UltraView60



UltraView90

Key Specifications

Specification	UltraView60	UltraView90
Total Number of Light Sources	Unlimited	Unlimited
Power Consumption	Low	Low
Rated Wattage	35W	80W
Warmup Time	0s	0s
Viewing Area (H/W/D)	H 400mm, W 706mm, D 403mm	H 570mm, W 896mm, D 580mm
Product Weight	20 Kg	57 Kg
Finish/Texture	Matt Munsell N5 or N7	Matt Munsell N5 or N7
LED Runtime	>20,000 Hrs	>20,000 Hrs
LED Total Life	>70,000 Hrs	>70,000 Hrs
Service Indicator Message	Yes	Yes
Brand Switch Sets	Yes	Yes
Accessories	UltraView Tilting Table (N7 and N5) Omnistretch	UltraView Tilting Table (N7 and N5) Omnistretch
UV Toggle	Yes	Yes
Rated Voltage	100-240 Vac 50/60 Hz	100-240 Vac 50/60 Hz
User Definable Switch Sets	Yes	Yes

Light Sources

Unlimited Light Sources

Pre-programmed LED light sources as standard:

D65 CIE D65 Daylight	L40-8 Store Light (4000K)
D50 CIE D50 Daylight	L35-8 Store Light (3500K)
D50-P1 CIE D50 Daylight for ISO 3664:2025 (P3 with UV toggle)	L30-8 Store Light (3000K)
D50-P2 CIE D50 Daylight for ISO 3664:2025 (P4 with UV toggle)	L31-9 Store Light (3100K)
A CIE Illuminant A	LED-B1 CIE LED (2700K)
Horizon Sunrise/Sunset (2300K)	LED-B2 CIE LED (3000K)
UV Ultraviolet	LED-B3 CIE LED (4000K)

Standards & Compliance

UltraView surpasses the requirements for visual evaluation under the following international standards:

Safety and Environmental


- IEC 61010-1
- RoHS
- UL 61010-1
- WEEE
- BS EN 61326-1
- BS EN 61000
- FCC CFR47 Part 15 Subpart B

Standards


- ISO 3664
- ISO 3668
- ISO 13076
- ISO 23603
- ASTM D1729
- AATCC EP9
- BS 950-1

Dimensions

UltraView60

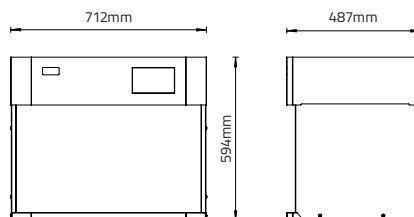

UltraView90

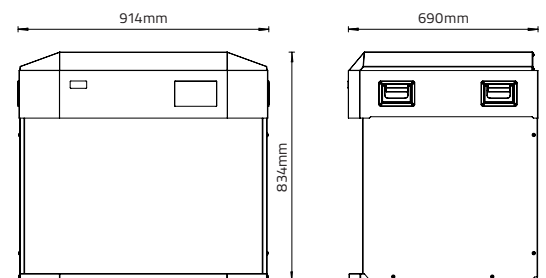



VISUAL
COLOUR MANAGEMENT

UltraView

Industry leading tuneable
LED technology by VeriVide

VeriVide
See in Truth

UltraView90



UltraView60



**Two Sizes.
Same trusted
performance.**

UltraView60 and UltraView90, VeriVide's range of tuneable LED light booths, deliver the exact same capabilities for consistent visual colour assessment across global supply chains.



**One light booth.
Every specification.**

Assess colour under retailer, industry, and customer lighting specifications within a single system.



**Future proof
technology**

UltraView delivers 20,000 hours of LED life, providing 10+ years of typical use.



**Consistent colour
assessment**

Standardised viewing conditions ensure colour is assessed consistently throughout global supply chains.



**Globally trusted
and specified**

Trusted by leading brands and manufacturers for colour quality assessment.

+44 (0)116 284 7790 email: sales@verivide.com www.verivide.com

UltraView

Built around your workflow



Key features and benefits

- ✓ Surpasses all major international standards including CIE, ISO, ASTM, AATCC, BSI, DIN, and SAE.
- ✓ Tight tolerance calibration maintains consistent viewing conditions year after year.
- ✓ Diffused lighting provides even illumination across the viewing area for accurate visual colour assessment.
- ✓ Future proof tuneable LED technology allows new light sources to be added and updated.
- ✓ Designed and manufactured in Britain with over 60 years of trusted colour expertise.
- ✓ Filtered UV and UV toggle enables accurate whiteness and optical brightening agent assessment.



Colour assessment at your fingertips

UltraView's digital touchscreen makes selecting and switching between light sources simple and easy, with each illuminant clearly displayed on screen. Customisable button sets also let you configure the display around your requirements.

Pre-programmed light sources as standard

D65 CIE D65 Daylight	L40-8 Store Light (4000K)
D50 CIE D50 Daylight	L35-8 Store Light (3500K)
D50-P1 CIE D50 Daylight for ISO 3664:2025 (P3 with UV toggle)	L30-8 Store Light (3000K)
D50-P2 CIE D50 Daylight for ISO 3664:2025 (P3 with UV toggle)	L31-9 Store Light (3100K)
A CIE Illuminant A	LED-B1 CIE LED (2700K)
Horizon Sunrise/Sunset (2300K)	LED-B2 CIE LED (3000K)
UV Ultraviolet	LED-B3 CIE LED (4000K)


Choose the UltraView that best suits your workflow

UltraView60



Compact and cost effective, delivering the full UltraView colour assessment features and capabilities in a smaller viewing area.

UltraView90

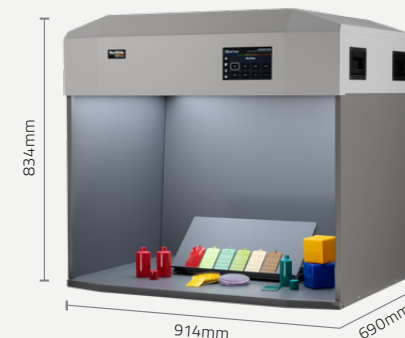

Spacious by design, delivering the same UltraView colour assessment features and capabilities in a larger viewing area.

SUITABLE FOR A WIDE RANGE OF INDUSTRIES



Plastics



Apparels



Building Materials



Cosmetics & Personal Car



Food & Drink



Prints & Packaging



Homeware



Medical & Pharmaceutical



Paints & Coatings

Find out how UltraView can benefit your colour workflow:

Call us on: +44 (0)116 284 7790

email: sales@verivide.com www.verivide.com

